

Features

- 2-color digital LCD display
- Copy function
- Programmable pressure unit : kPa、MPa、kgf/cm²、bar、psi、inHg
- Sensor parts & Fitting parts : Stainless steel 316L
- Corrosive fluid or gas available
- IP65 enclosure




SPECIFICATION

TYPE	Compound	Vacuum	Positive	High
MODEL	AP50C	AP50V	AP50P	AP50H
Rated pressure range	-100.0 ~ 100.0 kPa (-14.50 ~ 14.50 psi)	0.0 ~ -101.3 kPa (0.0 ~ -29.9 inHg)	0.000 ~ 1.000 MPa (0.0 ~ 145.0 psi)	0.000 ~ 2.00 MPa (0.0 ~ 290 psi)
Setting pressure range	-101.0 ~ 101.0 kPa (-14.50 ~ 14.50 psi)	10.0 ~ -101.3 kPa (-29.9 inHg ~ 1.45 psi)	-0.050 ~ 1.000 MPa (-7.3 ~ 145.0 psi)	-0.050 ~ 2.00 MPa (-7.3 ~ 290 psi)

FEATURES HIGHLIGHT


1 Quick Installation

- Save Installation Time
- Easy Removal




2 Copy Setting

- Avoid setting errors
- Reduce setting time

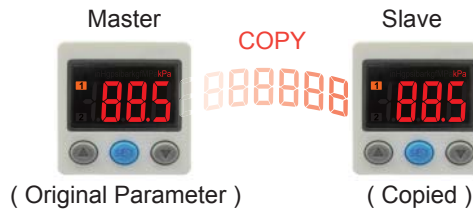

3 Easy Unit Identification

- Conversion unit is on display and easy to read.

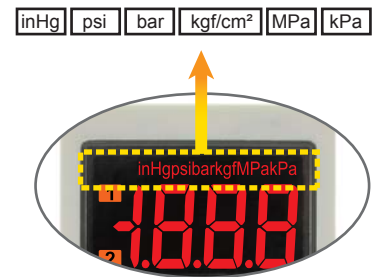

4 2 Color Main Display

- User programmable color mode, for different setting conditions.



	5psi	5psi	10psi	10psi
ON	Green	Red	Green	Red
OFF	Red	Green	Green	Red

5 IP65 Compliance

- Protected against water and dust splash from all directions.



6 Environmental Protection Design

- RoHS Compliance / Without Harmful Substance

